

**FLOOR[®]
EXPERTS**

Vinyl SPC Floor
Winflex Herringbone

Winflex Herringbone

London / Dublin /

Birmingham / Bristol /

Glasgow / Liverpool /

Vinyl SPC Floor




Esence of Flooring

Winflex SPC Vinyl Flooring represents a new generation in the group of PVC flooring. Its unique durable SPC core ensures an up to 3x greater stability of plates and higher resistance to impact. High density and small dimensions indicate that they are very suitable for floor heating. Click design of the tongue enables a simple and quick installation without the necessity for adhesive use.

New Winflex SPC Vinyl Flooring (Stabilo, Rigid, Classic plus & Imperial) offers new, more realistic decoration, which follows global trends in flooring design.

Beauty and durability of the product goes hand in hand with the simplicity of installation.

Structure

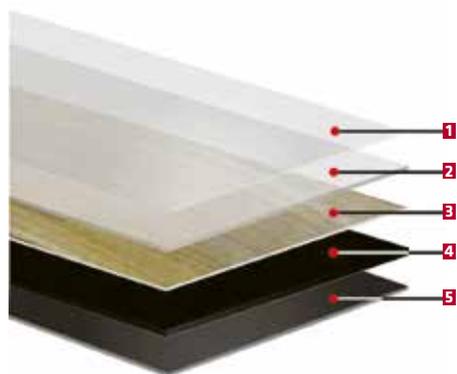

SPC - Herringbone

1. UV Coating
2. Wear layer
3. PVC decor film
4. SPC layer
5. IXPE layer 1 mm

Advantages

PU LAYER



PU protection layer

Winflex® SPC planks have surface protected with polyurethane layer, which protects the floor from scratches and dirt.

V-GROOVE



V-groove

Bevelled edges contribute to the natural look of the floor and makes for harmonious and stylish whole.

ECO



Eco-friendly floors

Winflex® SPC planks are made according to technology, which follows ecological trends. Planks do not contain phthalate and they passed antibacterial tests.

EASY TO CARE



Easy to maintain

Thanks to PU protective layer, the floors are extraordinary easy to maintain.



Waterproof

Because of their unique composition, Winflex® SPC planks are waterproof. Thus, they are also suitable for rooms/ areas with high humidity.

STABILITY



Dimension stability

Winflex® SPC planks due to rigid material were twice better stability, than PVC planks.

CLICK SYSTEM



Easy to install

Winflex® SPC click system allows you easy installation.

VOC TEST A+



Palette

London



Bristol



Dublin



Glasgow



Birmingham



Liverpool







5,5/0,55 x 625 x 125 mm

Decor - OAK 1164

Colour - Middle

Class - 33/42

valinge+5Gi

Structure - Wood

London

/Herringbone







5,5/0,55 x 625 x 125 mm

Decor - OAK 1165

Colour - Middle

Class - 33/42

valinge+5Gi

Structure - Wood

Dublin

/Herringbone







Birmingham

/Herringbone

5,5/0,55 x 625 x 125 mm

Decor - OAK 1166

Colour - Middle

Class - 33/42

valinge+5Gi

Structure - Wood







5,5/0,55 x 625 x 125 mm

Decor - OAK 1167

Colour - Middle

Class - 33/42

valinge+5Gi

Structure - Wood

Bristol

/Herringbone







Glasgow

/Herringbone

5,5/0,55 x 625 x 125 mm

Decor - OAK 1168

Colour - Middle

Class - 33/42

valinge+5Gi

Structure - Wood







5,5/0,55 x 625 x 125 mm

Decor - OAK 1169

Colour - Middle

Class - 33/42

valinge+5Gi

Structure - Wood

Liverpool

/Herringbone




Product specification:

CHARACTERISTIC	RESULT SPC	REQUIREMENTS	STANDARDS
Phtalate tests	Free	N/A	EN 14372:2004
Light stability	Grade 6	N/A	ISO B02:1994
Dimension stability	x = direction: 0,04%, y = direction: 0,06%	< 0,25%	EN 434
Resistance to chemicals	No change in surface dulling, surface attack, or staining was detected.	No more than slight change in surface dulling, surface attack, or staining.	EN 374
Castor Chair resistance	After 25000 cycles no visible damage	N/A	EN 425
Abrasion resistance	0,5 mm wear layer W33/42 0,3 mm wear layer W23/31	N/A	EN 13329
Pentachlorophenol (PCP)	N/A	N/A	CEN/TR 14823:2003
Formaldehyde emission	N. D.	E1<0,124 mg/m ³	EN 717-1:2004
Fire resistance	Bfl-s1	N/A	EN 13501-1
Slip resistance	$\mu = 0,36$ Class DS, R11	$\mu > 0,3$	EN 13893:2003
Squareness	Max = 0,05 mm/180 mm Max = 0,1 mm/1220 mm	<0,25/305 mm	ASTM F2055-17
Thermal conductivity	= 0,114 W/(mK)	N/A	EN14234

Product dimensions

WINFLEX HERRINGBONE: 625 x 125 x 5,5/0,55 mm



Underfloor heating: Not all flooring is suitable for underfloor heating. Due to a multi-layered composition of the Heritage Dream parquet flooring heat conduction is good and the flooring can easily be used on underfloor heating systems.



Characteristics



low maintenance & hard-wearing



largely resistant to cigarette burns



durable & impact resistant



stain resistant



non-fading and retain their brilliance over many years



abrasion resistant



flame resistant



comfortable underfoot



well-suited for installation over subfloor heating

Special properties



painted

The images in this brochure are only indicative of the appearance you can achieve and the floor may look different to the samples. We therefore suggest you visit your supplier to view larger display of boards which will give a better indication of how it will actually look.



floor-experts.com